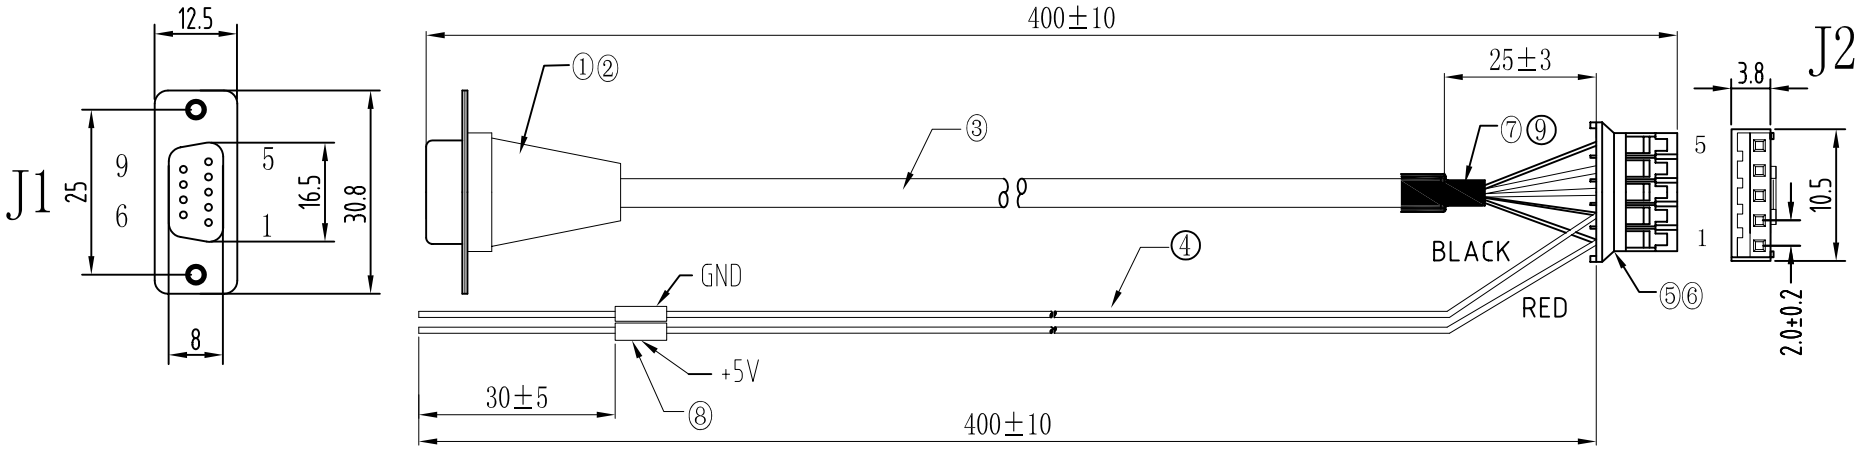

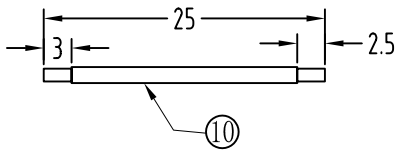

MATERIAL LIST:

①PIN:DB 9P F BLUE CORE
②RUBBER: 45P PVC BLACK
③CABLE: UL2464 26AWG*6C+AE BLACK 0D: 5.0
CORE CABLE: BLACK, BROWN,RED,ORANGE,YELLOW,GREEN
④CABLE: UL 1061 28AWG RED and BLACK
⑤HOUSING: PH PITCH 2.0mm 5P WHITE PH-5Y
⑥END:PH-T 5PCS
⑦HOT-SHRINK JACKET: Ø5.0*20 BLACK THIN
⑧HOT-SHRINK JACKET: Ø2.5*10 TRANSPARENCE THIN 2PCS
⑨HOT-SHRINK JACKET: Ø2.0*10 BLACK THIN
⑩CABLE:UL 1061 26AWG BLACK

PIN ASSEMBLY:

J1		J2	
8	GREEN	5	
2	YELLOW	4	
3	ORANGE	3	
5	BLACK+GND	2(amalgamate)	BLACK
1+6	RED	1(amalgamate)	RED

REV.	DESCRIPTION	DATE	DRAW	CHECK	APPROVE
A	FIRST ISSUE	07-1-12	Sara	Kevin	Gray Wang

Leading Touch

DO NOT SCALE DRAWING
UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE IN MILLIMETERS
TOLERANCES ARE:
LINEAR TOL: .X=±1.0
.XX=±0.5
ANGULAR TOL: ±1°

MODEL: 14-112-040
DESCRIPTION: 232 inner-frame cable
MATERIAL:
FINISH:
PROJECTION
SIZE: A4
SCALE 1:1
WEIGHT: Kg
COLOR: BLACK
DRAWING NO.:
SHEET 1 OF 1
REV. A