


### MATERIAL LIST

- ①HOUSING:PH PITCH 2.0mm 4P WHITE PH-4Y
- ②END:PH-T PH PITCH 2.0mm 4PCS
- ③CABLE: UL2464 26AWG\*4C+AEB BLACK OD: 5.0  
CORE CABLE: BLACK, GREEN,RED,WHITE
- ④HOT-SHRINK JACKET: Ø5.0\*25 BLACK THIN TYPE: UL
- ⑤PIN: USB A/M 4P
- ⑥RUBBER: 45P PVC BLACK 4.4 g
- ⑦HOT-SHRINK JACKET: Ø1.0\*18 BLACK THIN TYPE: UL
- ⑧OT END:Ø4.0mm 60440-BS-2
- ⑨HOT-SHRINK JACKET: Ø3.0\*15 BLACK THIN TYPE: UL
- ⑩CABLE:UL 1007 22AWG BLACK L=500mm

#### PIN ASSEMBLY:

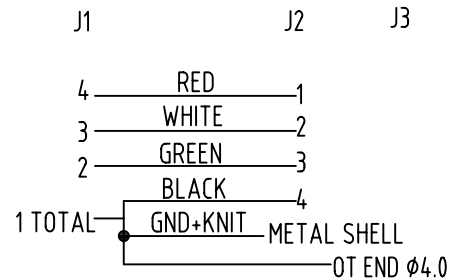

						<b>Leading Touch</b>	MODEL	PROJECTION
							14-211-180	
						DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: LINEAR TOL: .X=±1.0 .XX=±0.5 ANGULAR TOL: ±1°	DESCRIPTION	SIZE: A4
							USB standard cable	SCALE 1:1
							MATERIAL	WEIGHT: Kg
						FINISH	COLOR: BLACK	
A	FIRST ISSUE	07-1-18	Sara	Kevin	Gray Wang			
REV.	DESCRIPTION	DATE	DRAW	CHECK	APPROVE	DRAWING NO.:	SHEET 1 OF 1	
							REV. A	