


I H G F E D C B A

6
5
4
3
2
1

6
5
4
3
2
1

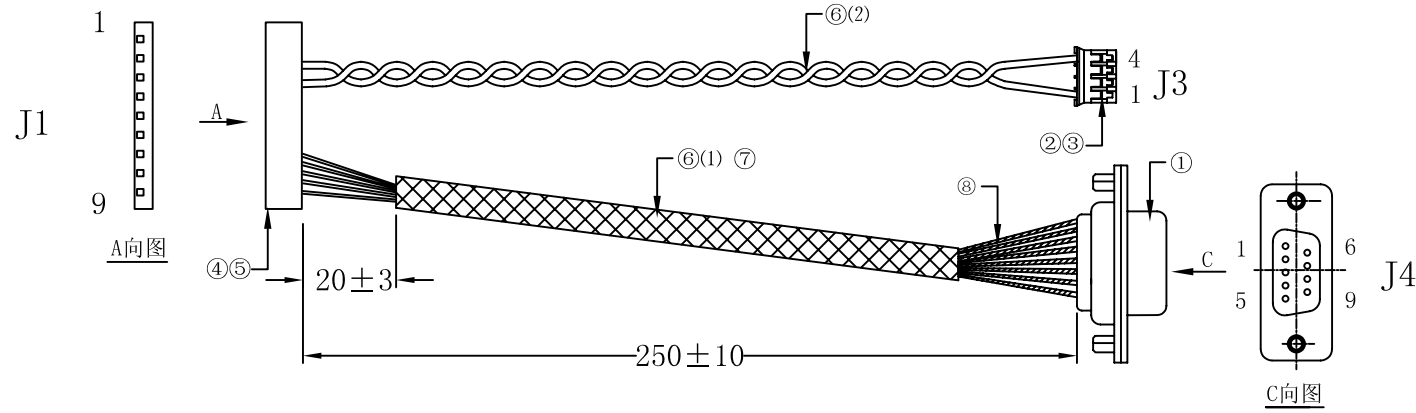


技术要求:

- 1、产品所用材料必须符合ROHS环保要求。
- 2、J1端芯线剥头2.0mm; J3 J4端剥外被2.5mm
- 3、J1端USB线剥外被25mm, 地线修掉留5mm, 短接一条UL1007 22AWG黑色线。
- 4、UL1007 22AWG线, 两端剥头3.5mm。
- 5、UL1571 28AWG线需绞成一条。
- 6、焊接DB9F时, 焊点需用1.5*12热缩管烘套。
- 7、A1252H-2*10P孔座的三角符号为第一位。

PH PITCH:2.0mm-9P PH-4P



PH PITCH:2.0mm-9P DB9F



⑧	热缩管	∅1.5*12mm 黑色(薄)	8
⑦	热缩管	∅5.0*225mm 黑色(薄)	1
⑥	线材	(2)UL1571 28AWG 红 黑 265±2mm	各1条
		(1)UL1061 28AWG 黑棕红橙黄绿蓝紫 255±2mm	各1条
⑤	孔座	PH Pitch:2.0mm 9P WHITE PH-9Y	1
④	END	Tie-in PH Pitch:2.0mm PH-T	9
③	孔座	PH-4P 尼龙白色	1
②	端子	PH-T 镀锡	2
①	插头	DB9F 母头 后铆螺母 蓝胶 前镍后锡	1
序号	构件名称	材料规格	数量

						Leading Touch DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: LINEAR TOL: X=±1.0 .XX=±0.5 ANGULAR TOL: ±1°	MODEL	PROJECTION
							14-815-025	
							DESCRIPTION	SIZE: A4
							232 inner-frame cable(9pin)	SCALE 1:1
						MATERIAL	WEIGHT:	
							Kg	
						FINISH	COLOR:	
							BLACK	
A	FIRST ISSUE	09-10-20	Sara	Kevin	Gray Wang	DRAWING NO.:		
REV.	DESCRIPTION	DATE	DRAW	CHECK	APPROVE	SHEET 1 OF 1		
						REV. A		

I H G F E D C B A