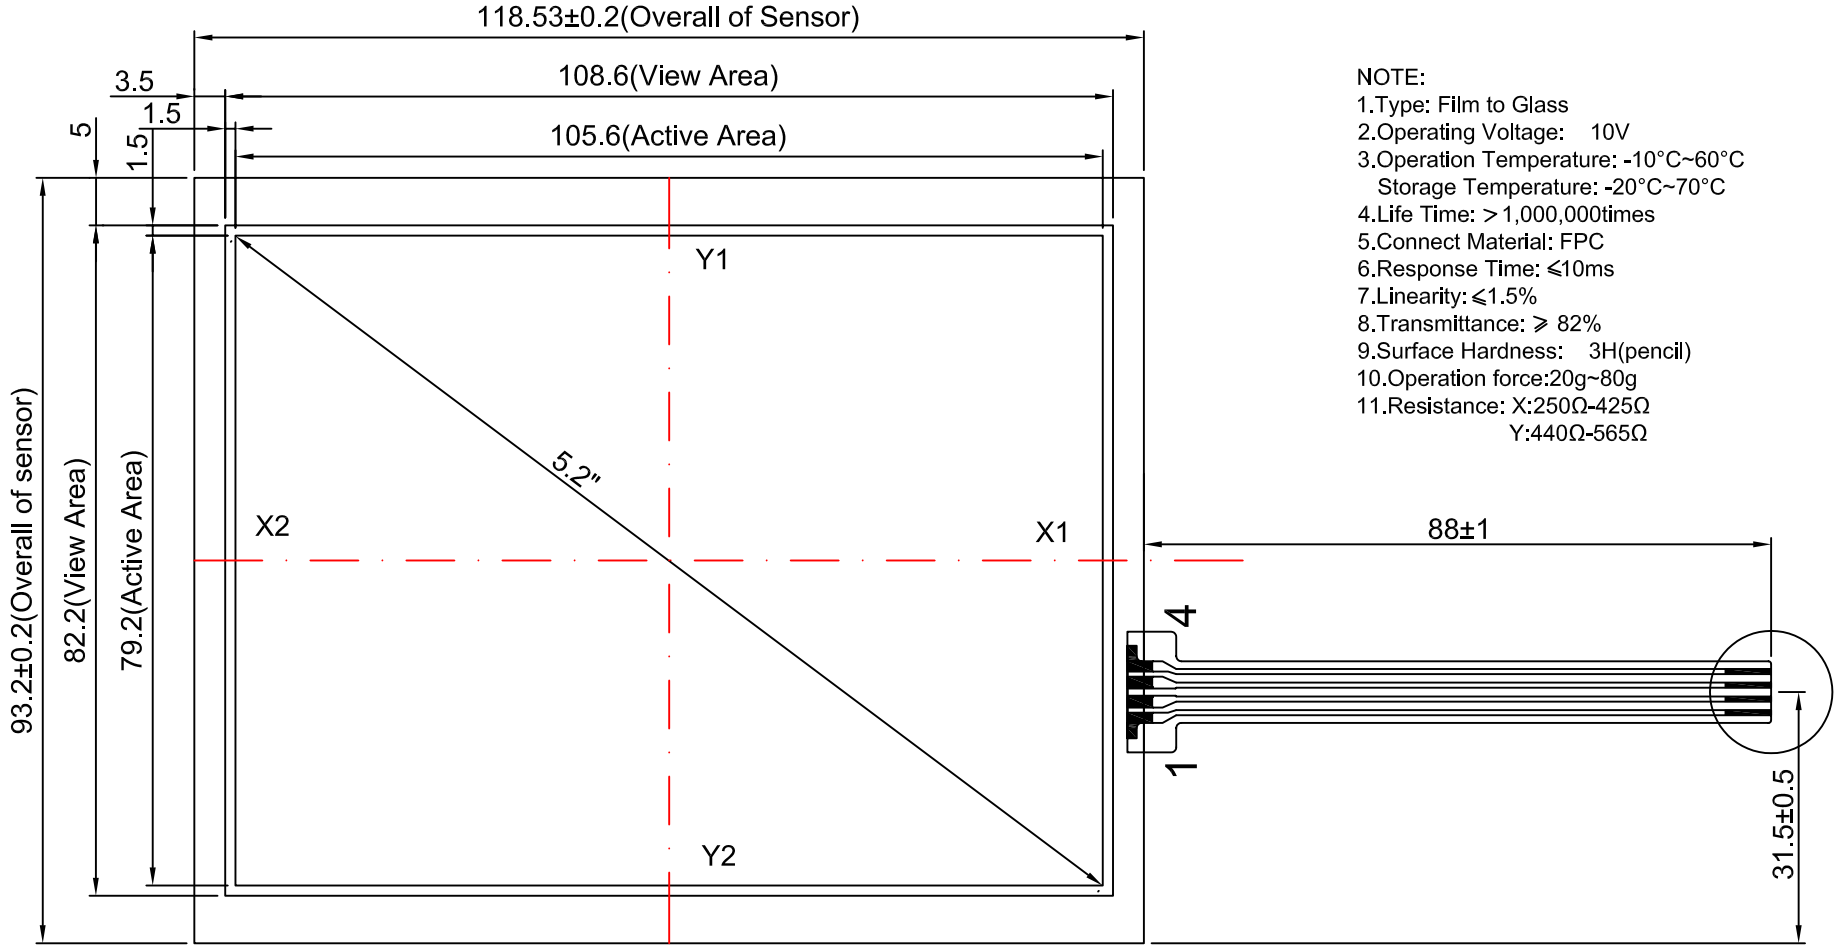

NOTE:
1.Type: Film to Glass
2.Operating Voltage: 10V
3.Operation Temperature: -10°C~60°C
Storage Temperature: -20°C~70°C
4.Life Time: >1,000,000times
5.Connect Material: FPC
6.Response Time: ≤10ms
7.Linearity: ≤1.5%
8.Transmittance: ≥ 82%
9.Surface Hardness: 3H(pencil)
10.Operation force:20g~80g
11.Resistance: X:250Ω-425Ω
Y:440Ω-565Ω

CONNECTOR PINOUT	
PIN NO	ASSIGNMENT
1	X2
2	Y2
3	X1
4	Y1

P/N	COVERSHEET TYPE	GLASS THICKNESS	FINISHED PART THICKNESS
4W0520AT-G11	CLEAR	1.1	1.4 ± 0.2
4W0520AT-N11	ANTI-GLARE		

REV.	DESCRIPTION	DATE	DRAW	CHECK	APPROVE
A0	FIRST ISSUE	08-1-29	Found	BING	CLOUD

Leading Touch

DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE IN MILLIMETERS
TOLERANCES ARE:
LINEAR TOL: .X=±1.0
.XX=±0.5
ANGULAR TOL: ±1°

MODEL	4W0520AT-N11
PROJECTION	
DESCRIPTION	5.2" 4W touchscreen
SIZE:	A4
SCALE	1:1
MATERIAL	
WEIGHT:	Kg
FINISH	
COLOR:	
DRAWING NO.:	
SHEET 1 OF 1	REV. A0