

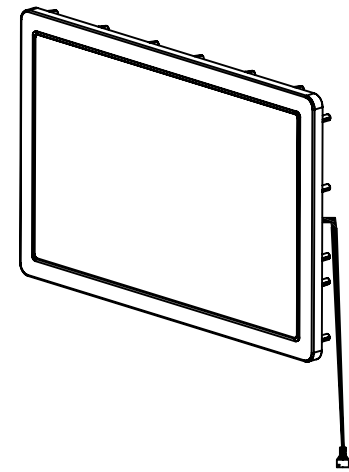
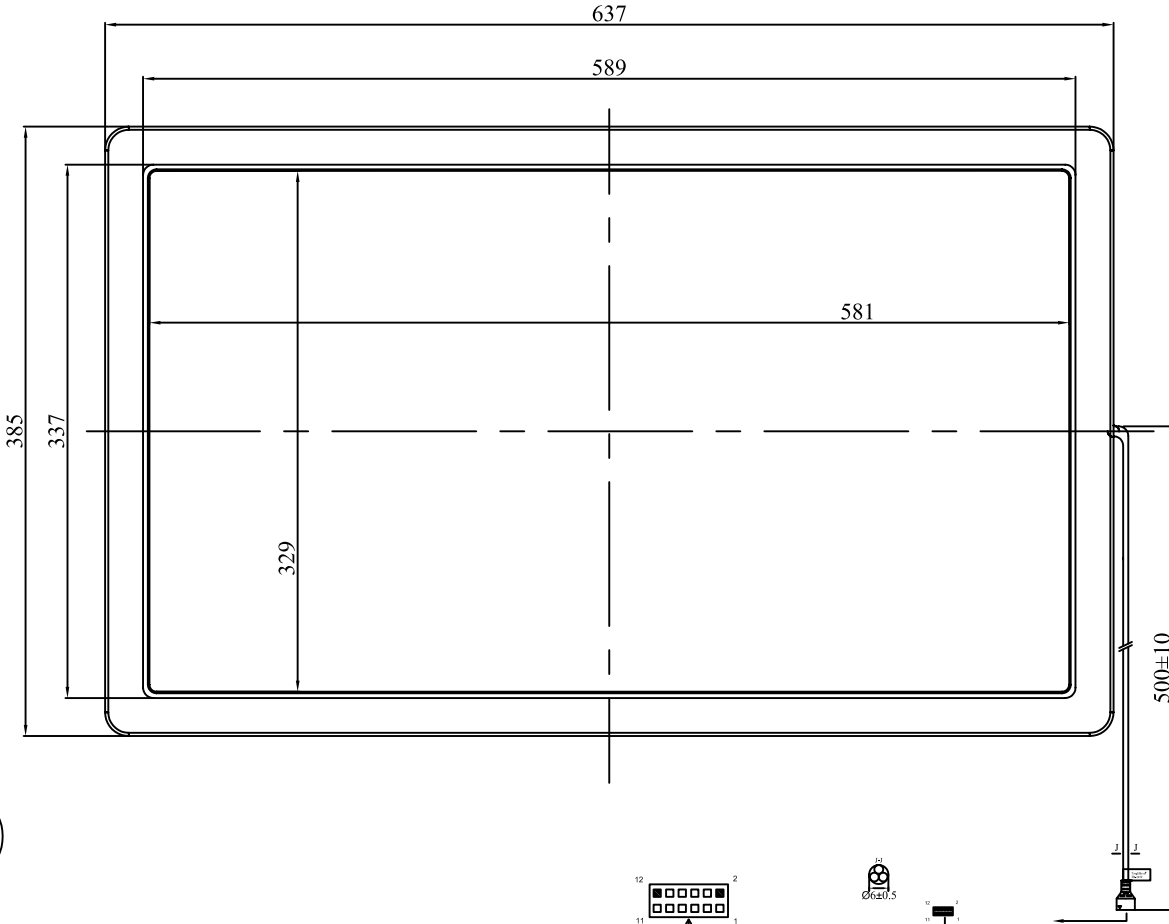



6  
5  
4  
3  
2  
1

6  
5  
4  
3  
2  
1

I H G F E D C B A

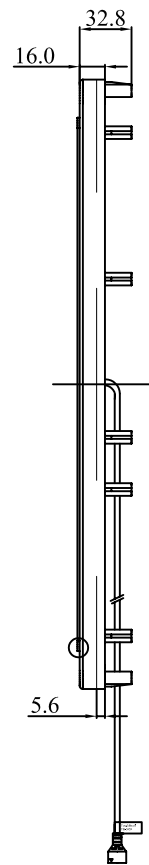



CONNECTION CHART			
PIN	SIGNAL	INSULATION COLOR	JACKET COLOR
1	GROUND	OVERALL SHIELD	
2	KEY		
3	Y RECEIVE+	BLU	BLK
4	Y TRANSMIT+	BLU	GRY
5	Y RECEIVE-	BLK	BLK
6	Y TRANSMIT-	YEL	GRY
7	GROUND	INNER SHIELD	
8	X TRANSMIT-	RED	RED
9	X RECEIVE-	RED	BLK
10	X TRANSMIT+	GRN	RED
11	X RECEIVE+	WHT	BLK
12	KEY		

- NOTES:
- ALL DIMENSIONS ARE +/-1.0 MILLIMETERS. DIMENSIONS SHOWN ARE PROJECTED DISTANCES.
  - WATERPROOF, DUSTPROOF, ANTIMAGNETIC, ANTISTATIC PERFORMANCES.
  - THE OUTER SHELL ADOPTS SPRAY-PLASTIC OF STAINLESS STEEL, AND THE COLOR IS BLACK.
  - LINE 14-6CX-XXX WITH 2x6 HOUSING RECEPTACLES, CABLE LENGTH 500mm, PEEL OFF OUTER INSULATION FOR 150mm LONG AND WRAP SHIELDED PAPER CONNECT TO  
 -----6XXX SERIAL CONTROL BOARD  
 -----6XXX USB CONTROL BOARD
  - GLASS THICKNESS: 4mm NOMINAL.
  - COVERSHEET TYPE: CLEAR.

						<b>Leading Touch</b> DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: LINEAR TOL: .X±1.0 .XX±0.5 ANGULAR TOL: ±1°	MODEL TM-2669	PROJECTION 
							DESCRIPTION 26" SAW touchbezel	SIZE: A4 SCALE 1:1
							MATERIAL	WEIGHT: Kg
							FINISH	COLOR: BLACK
A	FIRST ISSUE	2009-3-11	sara	david	cloud			
REV.	DESCRIPTION	DATE	DRAW	CHECK	APPROVE	DRAWING NO.:	SHEET 1 OF 2	REV. A

I H G F E D C B A

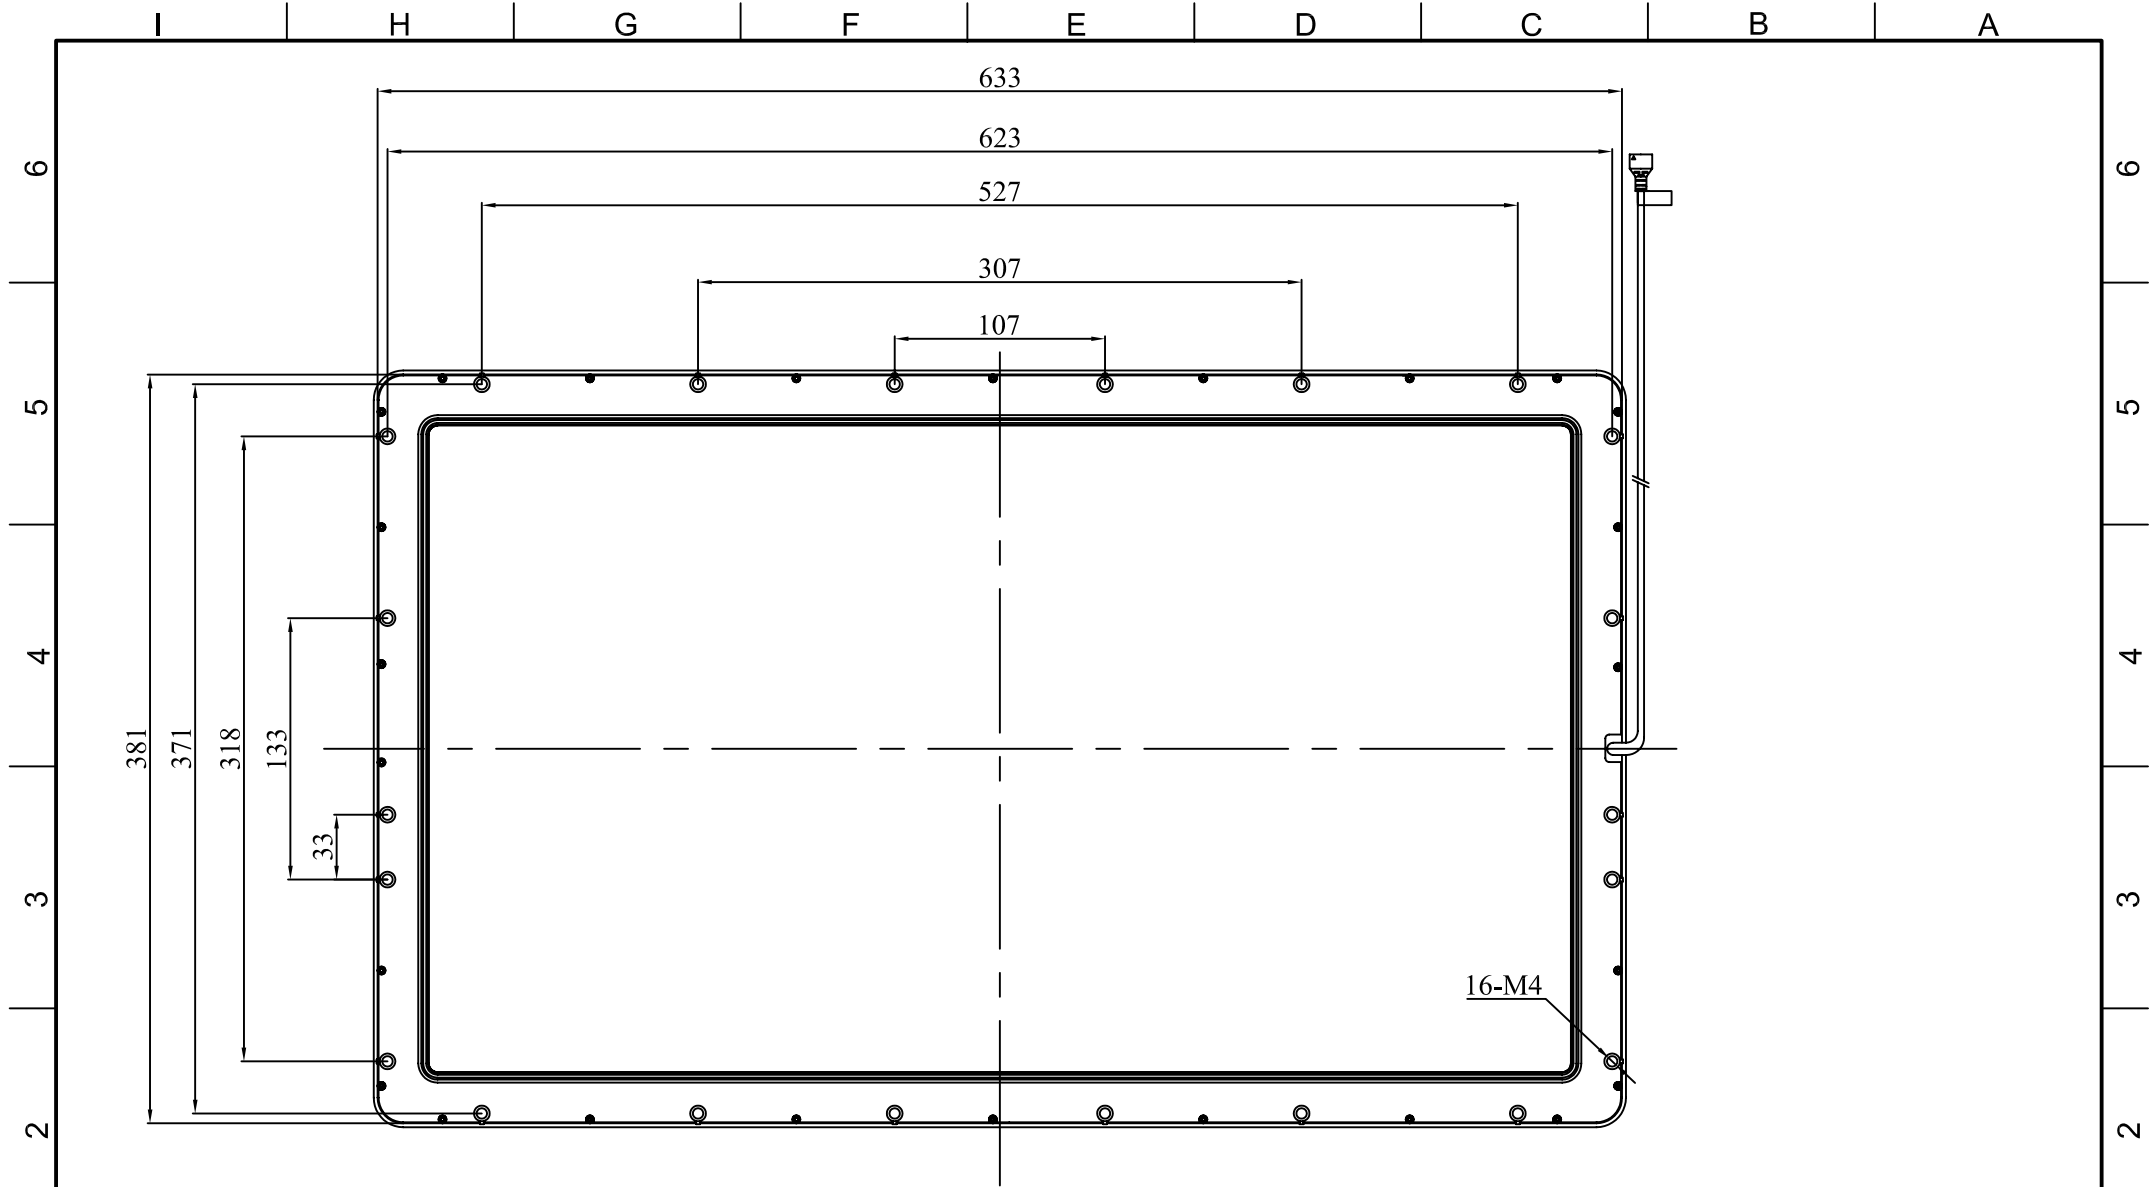

						<b>Leading Touch</b> DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: LINEAR TOL: .X=±1.0 .XX=±0.5 ANGULAR TOL: ±1°	MODEL TM-2669	PROJECTION 
							DESCRIPTION 26" SAW touchbezel	SIZE: A4 SCALE 1:1
							MATERIAL	WEIGHT: Kg
							FINISH	COLOR: BLACK
A	FIRST ISSUE	2009-3-11	sara	david	cloud			
REV.	DESCRIPTION	DATE	DRAW	CHECK	APPROVE	DRAWING NO.:	SHEET 2 OF 2	REV. A