




19" Rear Mount Touchmonitor

TM-1938

Features

- Rear Mount
- Slim profile with unique narrow border
- Multiple mounting options
- Rear-mount VESA mounting option and removable wing bracket for VESA
- Detachable cables for easy cable harnessing
- Single power supply for all optional devices
- Multilingual and detachable On Screen Display (OSD)
- Comb Serial and USB touch interface
- Super-sensitive, drift-free, precise touch with no overlay
- Long-lasting product cycle
- Worldwide agency approvals



19" Rear Mount Touchmonitor

TM-1938



Leadingtouch Rear Mount LCD's touchmonitors are designed for easy integration into kiosk, gaming machine, industrial enclosure and other installations where compact, touch-integrated display are preferred. TM-193 series integrate the Leadingtouch's IP65 level SAW, Resistive Capacitive touchscreen, TM-193 series is Dustproof and Waterproof touchmonitors.

TM-193 series are designed for space saving and easy mounting integrations. The rear-mount configuration along with optional side mounting brackets would enable you to easily customize into kiosks, cabinets, in-wall as well as other enclosures.

TM-193 series will have Leadingtouch Combo controller with dual touch ports for convenience and flexibility. It will enable you to use both the Serial RS-232 as well as USB port for your touchscreen application.

Product Information




P/N	Touch Technology
TM-1938	Infrared touchscreen

Specifications


Model	TM-1938
Description	19" TFT Rear Mount Touchmonitor
Case/Bezel Color	Black
Display	4:3 Ratio Active matrix TFT LCD
Optimal(native) resolution	1280X1024@60Hz
Synchronization Range	Horizontal:30-80 kHz; Vertical: 60-75Hz
Useful screen area	Horizontal: 14.8" (376 mm);Vertical: 11.85" (301mm)
Colors	16.7 million
Brightness	LCD panel: 300cd/m2 (typical) With touchscreen: 280 cd/m2 (typical)
Pixel Pitch	0.294 x 0.294 mm
Response Time	8 msec (typical)
Contrast ratio	800:1 typical
Viewing angle(typical, from center)	Horizontal (left/right): 160°(80° /80°) Vertical (up/down): 170°(85° /85°)
Backlight Lamp life	50,000 Hrs to 1/2 brightness
Input video format	VGA or DVI optional
Input video signal connector	Mini D-Sub 15-Pin VGA type
On Screen Display(OSD)	Remote OSD with 1.2m cable
Touch Technology	Infrared
Touch Interface	Combo 10ms232 and USB interface
Touch Resistive Time	10ms
Mounting Options	Rear mount VESA, 75 mm & 100mm
Power supply	External:100-240V AC, 50-60 Hz
Power Consumption	50W max
Temperature Range	Operating: 0°C to 50°C; Storage: -20°C to 60°C
Humidity Range	Operating: 10%-90%; Storage: 5%-90% no condensing
Touchmonitor Dimension	415x 343x 50(mm)
Shipping Carton Dimension	515x 450 x 175(mm)
Weight(approx.)	Monitor: 4.6kg / shipping: 7kg
Warranty	Monitor: 3 years'; LCD Panel: 1 year
Agency Approvals	FCC, CE, RoHS compliant

19" Rear Mount Touchmonitor


TM-1938

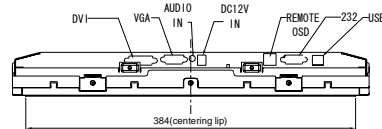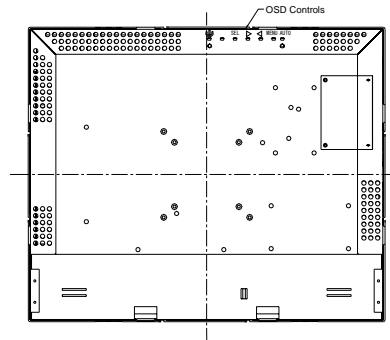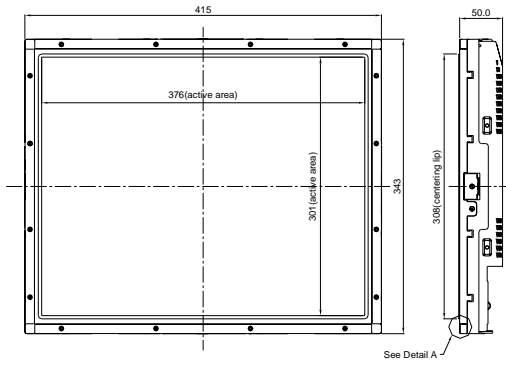


RECOMMEND CUSTOMER PANEL CUT-OUT

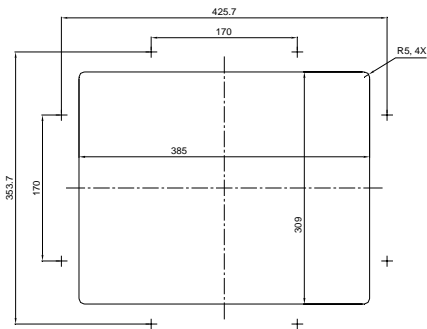


VESA MOUNT

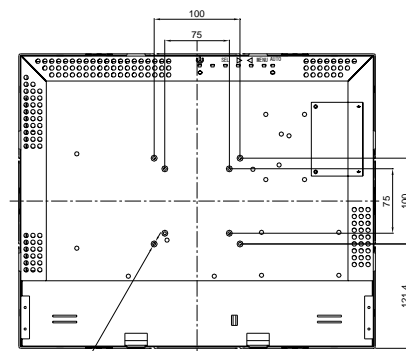


SIDE MOUNT VERTICAL



MOUNTING BRACKET ADJUSTMENT RANGE





REAR MOUNT WITH BRACKETS HORIZONTAL OR VERTICAL

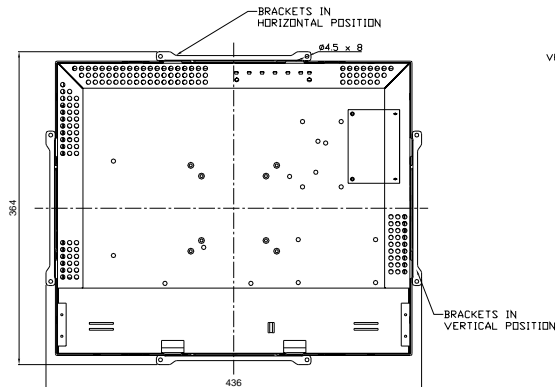

R-#7 M4 THREAD
VESA MOUNT MAX. SCREW DEPTH THE 7mm

SIDE MOUNT HORIZONTAL



19" Rear Mount Touchmonitor

TM-1938

Optional Accessory: Remote OSD Controller Box

