



19" Widescreen Rear Mount Touchmonitor

TM-1967

Features

- Rear Mount
- Slim profile with unique narrow border
- Multiple mounting options
- Rear-mount VESA mounting option and removable wing bracket for VESA
- Detachable cables for easy cable harnessing
- Single power supply for all optional devices
- Multilingual and detachable On Screen Display (OSD)
- Comb Serial and USB touch interface
- Super-sensitive, drift-free, precise touch with no overlay
- Long-lasting product cycle
- Worldwide agency approvals



19" Widescreen Rear Mount Touchmonitor

TM-1967



Leadingtouch Rear Mount LCD's touchmonitors are designed for easy integration into kiosk, gaming machine, industrial enclosure and other installations where compact, touch-integrated display are preferred. TM-196 series integrate the Leadingtouch's IP65 level SAW, Resistive, Capacitive or Infrared touchscreen, TM-196 series is Dustproof and Waterproof touchmonitors.

TM-196 series are designed for space saving and easy mounting integrations. The rear-mount configuration along with optional side mounting brackets would enable you to easily customize into kiosks, cabinets, in-wall as well as other enclosures.

TM-196 series will have Leadingtouch Combo controller with dual touch ports for convenience and flexibility. It will enable you to use both the Serial RS-232 as well as USB port for your touchscreen application.

Product Information


P/N	Touch Technology
TM-1969	SAW touchscreen
TM-1967	Capacitive touchscreen
TM-1964	4 Wire Resistive touchscreen
TM-1965	5 Wire Resistive touchscreen

Specifications




Model	TM-1967
Description	19" Widescreen TFT Rear Mount Touchmonitor
Case/Bezel Color	Black
Display	16:9 Ratio Active matrix TFT LCD
Optimal(native) resolution	1440x3(RGB) x 900 @60Hz
Synchronization Range	Horizontal:50 kHz; Vertical: 60Hz
Useful screen area	Horizontal:16.07"(408.2mm):Vertical: 10.05" (255.2
Colors	16.7 million
Brightness	LCD panel: 300 cd/m2 (typical) With touchscreen: 280 cd/m2 (typical)
Pixel Pitch	0.297 x 0.297 mm
Response Time	5 msec (typical)
Contrast ratio	800:1 typical
Viewing angle(typical, from center)	Horizontal (left/right): 160°(80° /80°) Vertical (up/down): 160°(80° /80°)
Backlight Lamp life	50,000 Hrs to 1/2 brightness
Input video format	VGA or DVI optional
Input video signal connector	Mini D-Sub 15-Pin VGA type
On Screen Display(OSD)	Remote OSD with 1.2m cable
Touch Technology	Capacitive (SAW, Resistive, Capacitive Optional)
Touch Interface	Combo 10ms232 and USB interface
Touch Resistive Time	10ms
Mounting Options	Rear Fixed, 75 mm & 100mm VESA mount
Power supply	External:100-240V AC, 50-60 Hz
Power Consumption	45.5W max
Temperature Range	Operating: 0°C to 50°C; Storage: -20°C to 60°C
Humidity Range	Operating: 5%-90%; Storage: 8%-90%
Touchmonitor Dimension	461 x 309 x 46.4(mm)
Shipping Carton Dimension	515x 450 x 175(mm)
Weight(approx.)	Monitor: 6.5ka / shipping: 21ka
Warranty	Monitor: 3 years; LCD Panel: 1 year
Agency Approvals	FCC, CE, RoHS compliant

19" Widescreen Rear Mount Touchmonitor



TM-1967

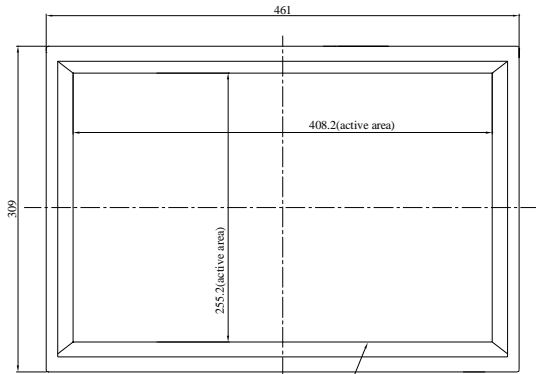

Pending IP65 Glue Seal inside metal frame

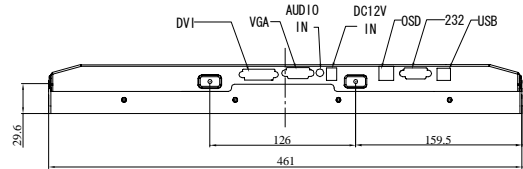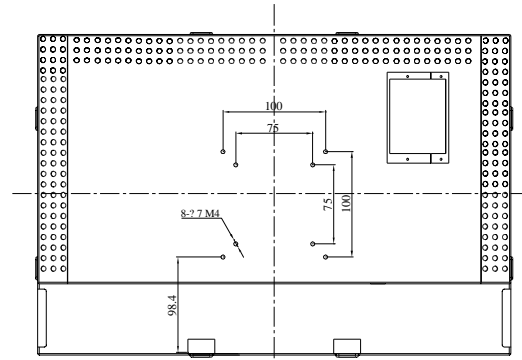



RECOMMEND CUSTOMER PANEL CUT-OUT

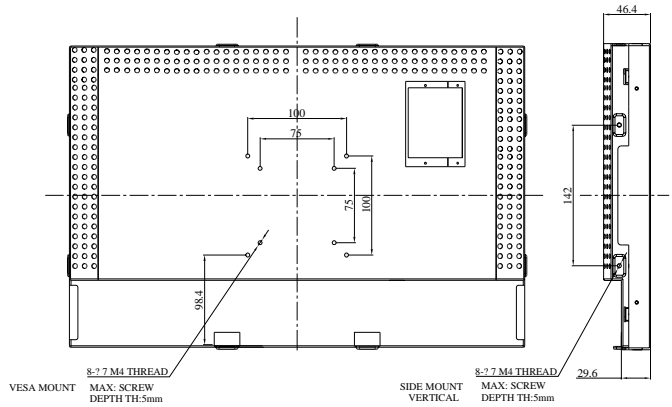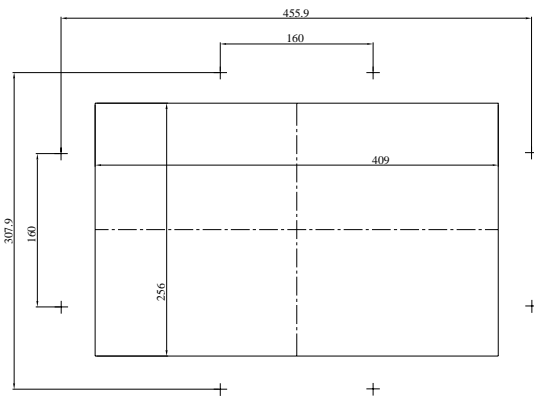

REAR MOUNT WITH BRACKETS
HORIZONTAL OR VERTICAL

BRACKETS IN
HORIZONTAL POSITION

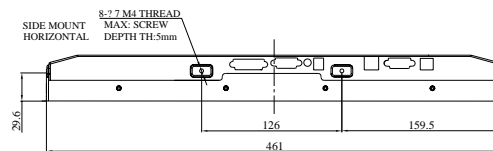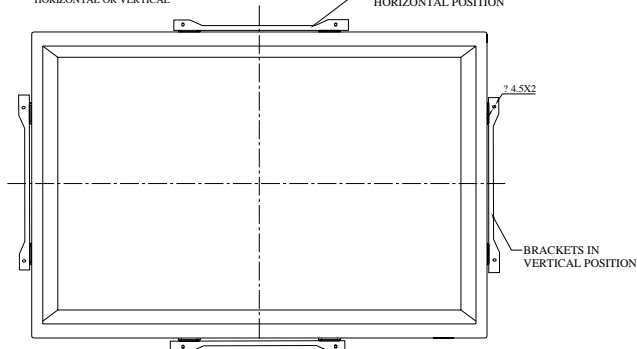

19" Widescreen Rear Mount Touchmonitor

TM-1967

Optional Accessory: Remote OSD Controller Box

