


P/N	COVERSHEET TYPE	GLASS THICKNESS
SA1500S20-G3	CLEAR	3.0mm
SA1500S20-N3	ANTI-GLARE	3.0mm

CONNECTION CHART			
PIN	SIGNAL	INSULATION COLOR	JACKET COLOR
1	GROUND	OVERALL SHIELD	
2	KEY		
3	Y RECEIVE+	BLU	BLK
4	Y TRANSMIT+	BLU	GRY
5	Y RECEIVE-	BLK	BLK
6	Y TRANSMIT-	YEL	GRY
7	GROUND	INNER SHIELD	
8	X TRANSMIT-	RED	RED
9	X RECEIVE-	RED	BLK
10	X TRANSMIT+	GRN	RED
11	X RECEIVE+	WHT	BLK
12	KEY		

- NOTES:
- ALL DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS SHOWN ARE PROJECTED DISTANCES.
  - GLASS THICKNESS: 4.0±0.3mm NOMINAL.
  - TRANSDUCERS ARE LOCATED AT THE POSITIONS SHOWN. GLASS IS BEVELED UNDER TRANSDUCERS. HEIGHT OF TRANSDUCERS ABOVE GLASS.
  - CABLE ROUTING ADDS A MAXIMUM OF 2.5mm AS INDICATED ON THE SCREEN. CABLE IS ROUTED ALONG THE BEVEL.
  - LINE 14-6CX-XXX, WITH 2x6 HOUSING RECEPTACLES, CONNECT TO  
 ----SAW SERIAL CONTROL BOARD SAW232(6000S)  
 ----SAW USB CONTROL BOARD SAWUSB (6000U)
  - THE TOUCH ACTIVE AREA IS LESS THAN THE VIEWABLE AREA TO FACILITATE SEALING.

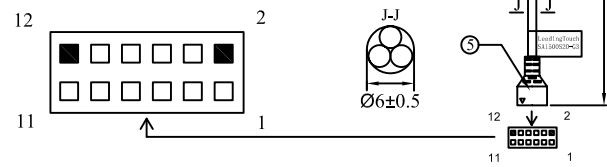

REV.	DESCRIPTION	DATE	DRAW	CHECK	APPROVE	DRAWING NO.:	SHEET 1 OF 1	REV. A0
A0	FIRST ISSUE	08-1-24	SARA	BING	CLOUD			

**Leading Touch**

DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE IN MILLIMETERS  
 TOLERANCES ARE:  
 LINEAR TOL: .X=±1.0  
 .XX=±0.5  
 ANGULAR TOL: ±1°

MODEL	SA1500S20-G3	PROJECTION	
DESCRIPTION	15" SAW Touchscreen	SIZE:	A4
MATERIAL		WEIGHT:	Kg
FINISH		COLOR:	BLACK