


P/N	SURFACE FINISH	GLASS THICKNESS
SA1560P30-G6	CLEAR	6
SA1560P30-N6	ANTI-GLARE	6
SA1560P30-A6	ANTI-REFLECTIVE	6

NOTES:
 1. ALL DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS SHOWN ARE PROJECTED DISTANCES.
 2. GLASS THICKNESS: 6mm. HEAT STRENGTHENED, MEET UL-60950 STEEL BALL DROP TEST.
 3. IP65 WATERPROOF. DUSTPROOF. ANTIMAGNETIC, ANTISTATIC AND BREAK RESISTANT PERFORMANCE.
 4. THE OUTER SHELL MATERIAL: ALUMINUM ALLOY. SPRAY-PLASTIC BLACK

- ① LINE: 146CX-XXX WITH 26 HOUSING RECEPTACLES, CONNECT TO COMBO SERIAL RS232 AND USB SAW CONTROLLER
- ② LINE: 146CX-XXX WITH 26 HOUSING RECEPTACLES, CONNECT TO USB SAW CONTROLLER
- ③ LINE: 146CX-XXX WITH 26 HOUSING RECEPTACLES, CONNECT TO SERIAL RS232 SAW CONTROLLER

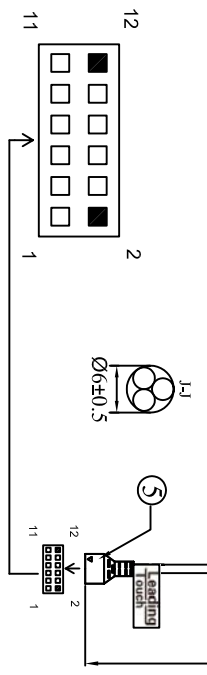

CONNECTION CHART	
PIN	SIGNAL
1	GROUND
2	KEY
3	Y RECEIVE+
4	Y TRANSMIT+
5	X RECEIVE-
6	X TRANSMIT-
7	GROUND
8	X TRANSMIT-
9	X RECEIVE-
10	X TRANSMIT+
11	X RECEIVE+
12	KEY

REV.	DESCRIPTION	DATE	DRAW	CHECK	APPROVE	DRAWING NO.:	MODEL	PROJECTION
A	FIRST ISSUE	09-11-17	Sara	David	CLOUD	ANGULAR TOL. ±1°	SA1560P30-G6	15.6" IP level SAW touchscreen
						LINEAR TOL.: X=±1.0 XX=±0.5	DESCRIPTION	SCALE: A4
						DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED	MATERIAL	SCALE: 1:1
						ALL DIMENSIONS ARE IN MILLIMETERS	FINISH	WEIGHT: Kg
						TOLERANCES ARE: LINEAR TOL.: X=±1.0 XX=±0.5	COLOR:	