


| P/N | SURFACE FINISH | GLASS THICKNESS |
|--------------|-----------------|-----------------|
| SA1711W30-G4 | CLEAR | 4 |
| SA1711W30-N4 | ANTI-GLARE | 4 |
| SA1711W30-A4 | ANTI-REFLECTIVE | 4 |

- NOTES:
- ALL DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS SHOWN ARE PROJECTED DISTANCES.
 - THE GLASS THICKNESS:4mm NOMINAL.
 - WATERPROOF, DUSTPROOF, ANTIMAGNETIC,ANTISTATIC PERFORMANCES.
 - THE OUTER SHELL ADOPTS SPRAY-PLASTIC OF ALUMINUM EXTRUSION PROFILES , AND THE COLOR IS BLACK.
- ⑤ LINE 14-6CX-XXX,WITH 2x6 HOUSING RECEPTACLES, CONNECT TO
 -----COMBO SERIAL RS232 AND USB SAW CONTROLLER
 -----USB SAW CONTROLLER
 -----SERIAL RS232 SAW CONTROLLER

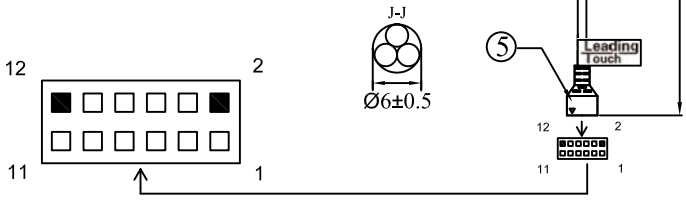

| CONNECTION CHART | | | |
|------------------|-------------|------------------|--------------|
| PIN | SIGNAL | INSULATION COLOR | JACKET COLOR |
| 1 | GROUND | OVERALL SHIELD | |
| 2 | KEY | | |
| 3 | Y RECEIVE+ | BLU | BLK |
| 4 | Y TRANSMIT+ | BLU | GRY |
| 5 | Y RECEIVE- | BLK | BLK |
| 6 | Y TRANSMIT- | YEL | GRY |
| 7 | GROUND | INNER SHIELD | |
| 8 | X TRANSMIT- | RED | RED |
| 9 | X RECEIVE- | RED | BLK |
| 10 | X TRANSMIT+ | GRN | RED |
| 11 | X RECEIVE+ | WHT | BLK |
| 12 | KEY | | |

| | | | | | | | |
|------|-------------|---------|-------|-------|--|--------------------------------|------------|
| | | | | | Leading Touch DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: LINEAR TOL: .X=±1.0 .XX=±0.5 ANGULAR TOL: ±1° | MODEL | PROJECTION |
| | | | | | | SA1711W30-G4 | |
| | | | | | | DESCRIPTION | SIZE: A4 |
| | | | | | | 17" Wide Protected-Water Panel | SCALE 1:1 |
| | | | | | MATERIAL | WEIGHT: | |
| | | | | | | Kg | |
| | | | | | FINISH | COLOR: | |
| | | | | | | | |
| A | FIRST ISSUE | 08-9-23 | Found | BING | CLOUD | | |
| REV. | DESCRIPTION | DATE | DRAW | CHECK | APPROVE | DRAWING NO.: | |