


P/N	SURFACE FINISH	GLASS THICKNESS
SA2150W30-G4	CLEAR	4
SA2150W30-N4	ANTI-GLARE	4
SA2150W30-A4	ANTI-REFLECTIVE	4

- NOTES:
- ALL DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS SHOWN ARE PROJECTED DISTANCES.
  - THE GLASS THICKNESS:4mm NOMINAL.
  - WATERPROOF, DUSTPROOF, ANTIMAGNETIC,ANTISTATIC PERFORMANCES.
  - THE OUTER SHELL ADOPTS SPRAY-PLASTIC OF ALUMINUM EXTRUSION PROFILES , AND THE COLOR IS BLACK.
  - LINE 14-6CX-XXX,WITH 2x6 HOUSING RECEPTACLES, CONNECT TO  
 -----COMBO SERIAL RS232 AND USB SAW CONTROLLER  
 -----USB SAW CONTROLLER  
 -----SERIAL RS232 SAW CONTROLLER

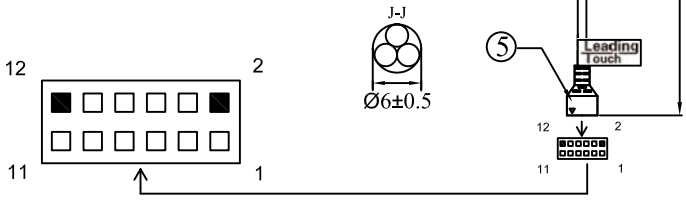

CONNECTION CHART			
PIN	SIGNAL	INSULATION COLOR	JACKET COLOR
1	GROUND	OVERALL SHIELD	
2	KEY		
3	Y RECEIVE+	BLU	BLK
4	Y TRANSMIT+	BLU	GRY
5	Y RECEIVE-	BLK	BLK
6	Y TRANSMIT-	YEL	GRY
7	GROUND	INNER SHIELD	
8	X TRANSMIT-	RED	RED
9	X RECEIVE-	RED	BLK
10	X TRANSMIT+	GRN	RED
11	X RECEIVE+	WHT	BLK
12	KEY		

						<b>Leading Touch</b> DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: LINEAR TOL: .X=±1.0 .XX=±0.5 ANGULAR TOL: ±1°	MODEL <b>SA2150W30-G4</b>	PROJECTION 
							DESCRIPTION 21.5" Wide Protected-Water Panel	SIZE: A4 SCALE 1:1
							MATERIAL	WEIGHT: Kg
							FINISH	COLOR:
A	FIRST ISSUE	09-10-10	Sara	David	CLOUD			
REV.	DESCRIPTION	DATE	DRAW	CHECK	APPROVE	DRAWING NO.:	SHEET 1 OF 1	REV. A