

6.2±0.3

494±1.0(Overall of sensor)

489.1±1.0

300±1.0(Overall of sensor)

294.9±1.0

443.6(View Area)


249.4(View Area)

500

760

P/N	SURFACE FINISH	GLASS THICKNESS
SA2012W30-G4	CLEAR	4
SA2012W30-G4	ANTI-GLARE	4

- NOTES:
- ALL DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS SHOWN ARE PROJECTED DISTANCES.
 - THE GLASS THICKNESS:4mm NOMINAL.
 - WATERPROOF,DUSTPROOF, ANTIMAGNETIC,ANTISTATIC PERFORMANCES.
 - THE OUTER SHELL ADOPTS SPRAY-PLASTIC OF ALUMINUM EXTRUSION PROFILES , AND THE COLOR IS BLACK.
- ⑤ LINE 14-6CX-XXX,WITH 2x6 HOUSING RECEPTACLES, CONNECT TO
- SAW SERIAL CONTROL BOARD SAW232(6000S)
 - SAW USB CONTROL BOARD SAWUSB (6000U)

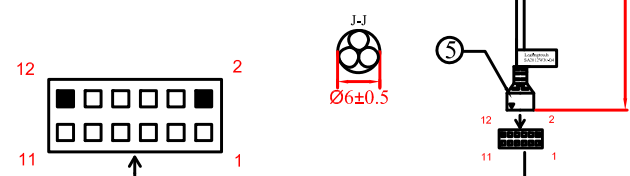

CONNECTION CHART			
PIN	SIGNAL	INSULATION COLOR	JACKET COLOR
1	GROUND	OVERALL SHIELD	
2	KEY		
3	Y RECEIVE+	BLU	BLK
4	Y TRANSMIT+	BLU	GRY
5	Y RECEIVE-	BLK	BLK
6	Y TRANSMIT-	YEL	GRY
7	GROUND	INNER SHIELD	
8	X TRANSMIT-	RED	RED
9	X RECEIVE-	RED	BLK
10	X TRANSMIT+	GRN	RED
11	X RECEIVE+	WHT	BLK
12	KEY		

<p>DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: LINEAR TOL: .XX±1.0 .XX±0.5 ANGULAR TOL: ±1°</p>	MODEL SA2012W30-G4	PROJECTION
	DESCRIPTION 20.1" Protected-Water Panel	SIZE: A4
		SCALE 1:1
		COLOR: BLACK

REV.	DESCRIPTION	DATE	DRAW	CHECK	APPROVE	DRAWING NO.:
A	FIRST ISSUE	11-08-08	Fang	Jocelyn	Cloud	